



red-y industrial series product information

Thermal Mass Flow Meters and Controllers for Gases with IP67 & Ex Protection

High accuracy for heavy duties:

Mass Flow Meters & Controllers with IP67 & Ex Protection

Reliable technology and industry standard interfaces for rough environments:

Our tried and tested thermal mass flow meters and controllers for gases now available as IP67/NEMA 6 version.

Accurate measurement

The devices offer high accuracy and a wide dynamic range.

2 instrument versions:

<Standard> and <Hi-Performance>

Accuracy up to $\pm 0.3\%$ of full scale + $\pm 0.5\%$ of reading

Turndown ratio 1 : 100

Extended turndown ratio on request

Analog & digital: 2 in 1



The flow meters & controllers make use of the latest CMOS technology and have a digital (Modbus RTU) and analog interface as standard

IP67/NEMA 6 protection



The instruments offer IP67/NEMA 6 protection against solid particles and water

ATEX certification



red-y industrial devices come along with ATEX certification (Category 3/Zone 2 & 22)

Multiple connections



The industrial series are available with different connection types: Cable gland with compression fitting or optional M12 plug on top

Options



Multigas device

A device can be used for up to 10 different gases or gas mixtures



Profibus

The instruments are available with Profibus interface: DP-V0 & DP-V1 protocols



Industrial Ethernet


Two industrial ethernet protocols *Profinet RT* and *EtherCAT* are available



3-year warranty*



High-quality components ensure long and trouble-free operation
*does not apply to calibration, options and accessories

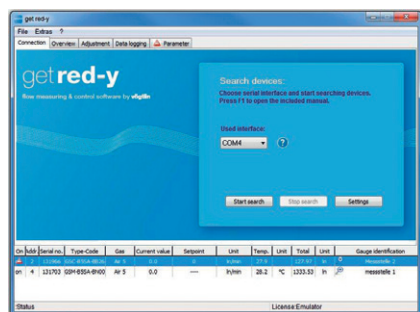

Setup tool <get red-y>

Efficient device setup with the free <get red-y> software:

- » **Service tool for remote maintenance**
- » **Switch gas type**
- » **Switch measurement units**
- » **Adjust control parameters**



Available connections red-y industrial series


**Cable gland
(Power / Modbus / Analog)**



**M12-A connector
(Power / Modbus / Analog)**



**Cable gland and
2 x M12-D connector (Profinet / EtherCAT)***

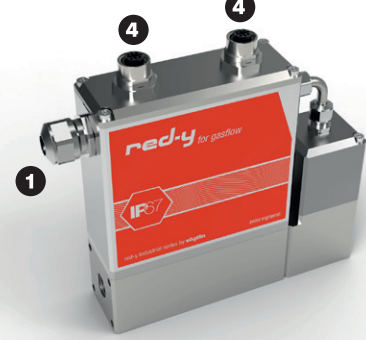

**Cable gland and
M12-B connector (Profibus)**



**M12-A connector and
M12-B connector (Profibus)**



**M12-A connector and
2 x M12-D connector (Profinet / EtherCAT)***




*IP-67 only / Profinet RT & EtherCAT option not yet ATEX certified. Please contact your sales partner for further information.

Electrical Connection


- 1 Cable gland / cable diameter 6-8mm
- 2 M12 connector A-Coding 8pol male
- 3 M12 connector B-Coding 5pol female
- 4 M12 connector D-Coding 4pol female

Dimensions red-y industrial series

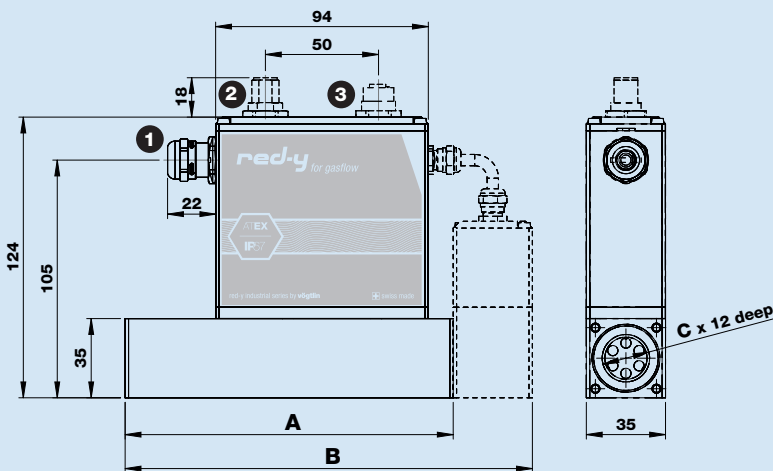

Type	Length (mm)		Process Connection
	A	B	C
GIM-A GIM-B GIM-C	94	–	G1/4"
GIM-D	145	–	G1/2"
GIC-A GIC-B GIC-C	–	134	G1/4"
GIC-D	–	198	G1/2"

Profinet / EtherCAT:

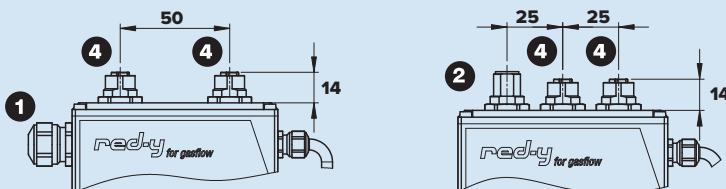

Technical Data red-y industrial series


Instrument types



industrial meter GIM
Thermal mass flow meter



industrial controller GIC
Thermal mass flow controller

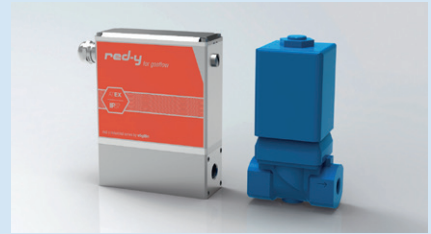

industrial controller GIE
Thermal mass flow controller with external valve

Instrument versions

«Standard»

The economic solution

Accuracy: $\pm 1.0\%$ of full scale⁽¹⁾
Turndown ratio: 1 : 50

«Hi-Performance»

With highest accuracy and turndown ratio
(available for GIM < 200 lN/min / GIC < 150 lN/min (air))

Accuracy: $\pm 0.3\%$ of full scale + $\pm 0.5\%$ of reading⁽¹⁾
Turndown ratio: 1 : 100

¹An additional error of $\pm 0.25\%$ may apply for analogue signals

Measuring ranges

(Air/Full scale freely selectable)	Type	Measuring range (air)		Process Connection
red-y industrial meter GIM Meter	GIM-A	from 0 ... 25 mlN/min	to 0 ... 600 mlN/min	G $\frac{1}{4}$ "
	GIM-B	from 0 ... 600 mlN/min	to 0 ... 6000 mlN/min	G $\frac{1}{4}$ "
	GIM-C	from 0 ... 6 lN/min	to 0 ... 60 lN/min	G $\frac{1}{4}$ "
	GIM-D	from 0 ... 60 lN/min	to 0 ... 450 lN/min	G $\frac{1}{2}$ "
red-y industrial controller GIC controller	GIC-A	from 0 ... 25 mlN/min	to 0 ... 600 mlN/min	G $\frac{1}{4}$ "
	GIC-B	from 0 ... 600 mlN/min	to 0 ... 6000 mlN/min	G $\frac{1}{4}$ "
	GIC-C	from 0 ... 6 lN/min	to 0 ... 60 lN/min	G $\frac{1}{4}$ "
	GIC-D	from 0 ... 60 lN/min	to 0 ... 450 lN/min	G $\frac{1}{2}$ "

Performance data

Media (real gas calibration)	Air, O ₂ ⁽²⁾ , N ₂ ⁽²⁾ , He, Ar, CO ₂ , H ₂ , CH ₄ , C ₃ H ₈ (other gases and gas mixtures on request) ² O ₂ & N ₂ are calibrated with air
Response time	Meter (GIM): $\pm 80\text{ms}$ ⁽³⁾ ; Controller (GIC): $\pm 500\text{ms}$ ⁽³⁾ ³ depending on device configuration & according to SEMI standard E17-1011, 5-100% of range under optimized conditions
Repeatability	$\pm 0.2\%$ of full scale (according to SEMI standard E56-0309)
Longterm stability	< 1% of measured value / year
Power supply	24 Vdc (18 – 30 Vdc), 15 Vdc on request
Current consumption Standard	Meter (GIM): max. 100mA; Controller (GIC): max. 250mA (GIC with valve type 8 max. 490mA)
Current consumption Profinet RT/EtherCAT	Meter (GIM): max. 100mA; Controller (GIC): max. 340mA (GIC with valve type 8 max. 560mA)
Operation pressure	0.2 – 11 bar a (GIC with valve type 4.5 and 8 max. 8 bar a)
Temperature (environment/gas)	0 – 50°C
Pressure sensitivity	Less than 0.2% RD per bar (typical N ₂)
Temperature sensitivity	Less than 0.025% FS per °C (typical N ₂)
Warm-up time	< 1 sec. for full accuracy

Materials

Body	Stainless steel 316L (see operating instructions for wetted parts)
Electronic Housing	Aluminum
Seals	EPDM (FDA), optional FKM and FFKM

Integration

In- / Output signals analog	0..20 mA, 4..20 mA, 0..5 V, 1..5 V, 0..10 V, 2..10 V
In- / Output signals digital	RS-485; Modbus RTU 2 wire (Slave); Lab View-VIs available Option: ProfiBus DP-V0, DP-V1/Profinet RT/EtherCAT
Process connection	G $\frac{1}{4}$ " (BSPP ⁽⁴⁾ female) up to 60 lN/min, G $\frac{1}{2}$ " (BSPP ⁽⁴⁾ female) up to 450 lN/min ⁴ British Standard Pipe Parallel
Inlet section	None required
Electrical connection	Cable gland with compression fitting M16x1.5 / Option: M12 plug (DIN-standard) (both connection IP67 protected)
Mounting orientation	All orientations are possible. We recommend horizontal mounting. Please contact the manufacturer for further information.

Safety

Test pressure	16 bara
Leak rate	< 1 x 10 ⁻⁶ mbar l/s He
Ingress protection class	IP67 (conforms to NEMA 6)
EMC	EN 61326-1
ATEX Certification ⁽⁵⁾	II 3G nA IIC T4 Gc (Category 3/Zone 2) II 3D Ex tc IIIC T100°C Dc (Category 3/Zone 22)

⁵Profinet RT & EtherCAT option not yet ATEX certified. Please contact your sales partner for further information.

Worldwide TASI Flow Network



Vögtlin Sales & Service Hub North America:

Sierra Instruments

5 Harris Court, Building L
Monterey, CA 93940, USA

Phone +1 800 866 0200

Fax +1 831 373 4402

sales@sierrainstruments.com

www.sierrainstruments.com

International Headquarter:

Vögtlin Instruments GmbH

St. Jakob-Strasse 84
4132 Muttenz, Switzerland

Phone +41 61 756 63 00

Fax +41 61 756 63 01

info@voegtlin.com

www.voegtlin.com

Vögtlin Sales & Service Hub China:

KEM flow technology (Beijing) Co., Ltd.

Rm. 906, Block C, RuiPu Office Bldg,
No. 15, HongJunYingNan Road,
Chaoyang District, Beijing 100012, China

Phone +86 10 849 29567

info@kem-kueppers.cn

www.voegtlin.cn

Find your local Vögtlin sales partner on our website:

www.voegtlin.com



Vögtlin Instruments GmbH – gas flow technology

St. Jakob-Strasse 84 | 4132 Muttenz (Switzerland)

Phone +41 61 756 63 00 | Fax +41 61 756 63 01

www.voegtlin.com | info@voegtlin.com

vögtlin 
instruments